# Rec'd PCT/PTO 21.MAR 2002

U.S. DEPARTMENT OF COMMERC	CE, PATENT AND TRADEMARK OFFICE	DATE: March 21, 2002
TRANSMITTAL LETTER TO THE UN	ITED STATES DESIGNATED/ELECTED OFFICE NG A FILING UNDER 35 U.S.C. 371	U.S. APPLN. NO. (if known):
INTERNATIONAL APPLICATION NO.: PCT/JP00/06004	INTERNATIONAL FILING DATE: SEPTEMBER 4, 2002	PRIORITY DATE CLAIMED: SEPTEMBER 21, 1999
TITLE OF INVENTION: DYNAMIC OPT USING THIS M	IMIZATION METHOD FOR SPEED DATA AND PO ETHOD	SITIONING DEVICE
APPLICANT(S) FOR DO/EO/US: Youid	hi HASHIMOTO	
Applicant hereby submits to the United	States Designated/Elected Office (DO/EO/US) the	following items and other information:
1. X This is a <b>FIRST</b> submission of	of items concerning a filing under 35 U.S.C. 371.	
2 This is a SECOND or SUBSE	EQUENT submission of items concerning a filing ur	nder 35 U.S.C. 371.
	n national examination procedures (35 USC 371(f) nit set in 35 USC 371(b) and PCT Articles 22 and 3	
A proper Demand for Internal date.	tional Preliminary Examination was made by the 1	9th month from the earliest claimed priority
5. X A copy of the International A	pplication as filed (35 U.S.C. 371(c)(2)):	
b. X has been transmit	owith (required only if not transmitted by the Internited by the International Bureau. the application was filed in the United States Reco	
6. X A translation of the Internati	onal Application into English (35 U.S.C. 371(c)(2)	).
7. X Amendments to the claims	of the International Application under PCT Article 1	9 (35 U.S.C. 371(c)(3))
	rewith (required only if not transmitted by the Inter	rnational Bureau).
c have not been ma	itted by the International Bureau. de; however, the time limit for making such amend de and will not be made.	dments has NOT expired.
8 A translation of the amendment	nents to the claims under PCT Article 19 (35 U.S.C	c. 371(c)(3)).
9 An oath or declaration of the	e inventor(s) (35 U.S.C. 371(c)(4)).	
10 A translation of the annexes	to the International Preliminary Examination Repo	ort under PCT Article 36 (35 U.S.C. 371(c)(5)).
ITEMS 11. TO 16. BELOW CONCER	N OTHER DOCUMENT(S) OR INFORMATION INC	LUDED:
11. X An Information Disclosure S	tatement under 37 CFR 1.97 and 1.98 and 5 refe	erences.
ASSIGNEE NAME AND ADD	or recording. A separate cover sheet in compliance RESS: <u>KABUSHIKI KAISHA YASKAWA DENKI</u> , Kit. publish the assignee data with the application.	akyushu-shi, Japan
13. X A FIRST preliminary amend	ment.	
14 A substitute specification.		
15 A change of power of attorn	ey and/or address letter.	
16. X Other items or information:	3 sheets of drawings.	

# JC13 Rec'd PCT/PTO 2 1 MAR 2002

ATTORNEY'S DOCKET NO: 020312

		Turromational	APPLICATION NO.	DATE:	S DOCKET NO: 020312
U.S. APPLICATION (if known)			JP00/06004	on c.	
10/	088094	<u> </u>			
17. X The follows	17. X The following fees are submitted:			CALCULATIONS	PTO USE ONLY
Basic National Fee (37 CFR 1.492(a)(1)-(5): Search Report has been prepared by the EPO or JPO:\$890.00				Į.	
International preliminary examination fee paid to USPTO (37 CFR 1.482) \$710.00					
No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))					
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO					
International preliminary examination fee (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$100.00			,		
	E	NTER APPROPRIAT	E BASIC FEE AMOUNT =	\$ 890.00	
Surcharge of \$13	30.00 for furnishing to om the earliest claim	he oath or declarati ed priority date (37	on later than 20 DVR 1.492(e)).	\$ 130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
TOTAL	4 -20 =		X \$ 18.00		
INDEPENDENT	2 - 3 =		x \$ 84.00		
	ent claims(s) (if appli	cable)	+ \$280.00		
TOTAL OF ABOVE CALCULATIONS =			\$1,020.00		
Reduction by 1/2 for filing by small entity, if applicable. (Note 37 CFR 1.9, 1.27, 1.28).					
SUBTOTAL =			\$1,020.00		
Processing fee of <b>\$130.00</b> for furnishing the English translation later than 20 30 months from the earliest claimed priority date (37 CFR 1.492(f)) +					
TOTAL NATIONAL FEE =			\$1,020.00		
Fee for recording must be accomp	g the enclosed assign panied by an appropr	ament (37 CFR 1.21 late cover sheet (37	L(h)). The assignment CFR 3.28, 3.31). \$40.00 per property +	\$ 40.00	
TOTAL FEES ENCLOSED =			\$1,060.00		
				Amount to be: refunder	\$
				charge	\$

#### ATTORNEY'S DOCKET NO: 020312

U.S. APPLICATION NO.

INTERNATIONAL APPLICATION NO. PCT/JP00/06004

DATE: March 21, 2002

(if known)

10/088094

- A check in the amount of \$1,060,00 to cover the above fees is enclosed. (\$890,00 for basic filing fee; \$130,00 for late filing of the declaration and \$40.00 for assignment recordation fee). (This paper is filed in triplicate)
- Please charge my Deposit Account No. 01-2340 in the amount of \$ to cover the above fees, (A duplicate copy of this sheet is enclosed.)
- The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 01-2340.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1,137(a) or (b)) must be filed to request that the application be restored to pending status.

Send All Correspondence To:

23850 PATENT TRADEMARK OFFICE

SIGNATURE

Ken-Ichi Hattori

32,861

REGISTRATION NUMBER

KH/vap

ARMSTRONG, WESTERMAN & HATTORI, LLP Suite 1000,1725 K Street, N W Washington, D. C. 20006 Tel: (202) 659-2930 Fax: (202) 887-0357

## PATENT

# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Youichi HAHSIMOTO

Serial No.: Not Yet Assigned

(§371 of international application No. PCT/JP00/06004)

Filed: March 21, 2002

For: DYNAMIC OPTIMIZING METHOD FOR SPEED DATA AND POSITIONING

DEVICE USING THIS METHOD

#### PRELIMINARY AMENDMENT

Commissioner for Patents Washington, D.C. 20231

March 21, 2002

Sir:

Prior to the calculation of the filing fees of the above application, please amend the application as follows:

# IN THE ABSTRACT OF THE DISCLOSURE:

Please add the Abstract of the Disclosure as shown on a separate page attached hereto.

#### Youichi HASHIMOTO

Docket No. 020312

#### REMARKS

In the event there are any additional fees required, please charge our Deposit Account No. 01-2340.

Respectfully submitted,

ARMSTRONG, WESTERMAN & HATTORI, LLP

Ren-Ichi Hattori Reg. No. 32,861

Atty. Docket No. 020312 Suite 1000 1725 K Street, N.W. Washington, D.C. 20006 Tel: (202) 659-2930 Youichi HASHIMOTO

Docket No. 020312

# ABSTRACT OF THE DISCLOSURE

A dynamic optimization method for speed data, for compensating for a speed data maximum value and a minimum resolution that can be specified by users without depending on a speed pattern preparation cycle. A dynamic optimizing method for speed data used for preparing a speed instruction pattern fed to a servo motor in a positioning device, wherein a speed pattern generator (1) that calculates a desired speed pattern when a moving instruction (2) such as a moving distance, speed, acceleration time and deceleration time is input is provided, and a speed pattern preparation cycle (3) can be specified by users without the possibility that speed data maximum value and a minimum resolution of speed data are modified.

3/prts

#### DESCRIPTION

# DYNAMIC OPTIMIZING METHOD FOR SPEED DATA AND POSITIONING DEVICE USING THIS METHOD

#### Technical Field

The present invention relates to a method for preparing a speed instruction pattern for a servo motor in a positioning device.

# Background Art

Conventionally, to prepare a speed pattern in a positioning device (CPU, controllers, servo amplifiers, and the like), the speed pattern preparation cycle and speed data are set as shown in Figs. 3, that is, speed data is set to 32 bits in both Fig. 3(a) and Fig. 3(b), and by means of the fixed decimal mode, 16 bits are set for the integer part and 16 bits are set for the decimal part to fix the decimal point position. The speed pattern preparation cycle as a cycle for outputting speed data is set to 8m sec in the case of Fig. 3(a) and 64m sec in the case of Fig. 3(b).

In the case of Fig. 3(a), the speed data maximum value is 245752500 (unit: min) and the minimum resolution is 0.11

(unit: min), on the other hand, in Fig. 3(b), the speed lowers and the resolution increases to a degree at which the speed data maximum value is 30719062 (unit: min) and the minimum resolution is 0.014 (unit: min).

Thus, the speed minimum resolution to be used inside the a positioning device has conventionally been set to a fixed value of 0.11 (unit: min) in Fig. 3(a) and 0.014 (unit: min) in Fig. 3(b) based on a speed pattern preparation cycle, speed unit specified by a user, and speed data maximum value specified by the user.

However, in the abovementioned conventional example, the larger the speed data maximum value, the larger the minimum resolution, and the smaller the minimum resolution, the smaller the speed data maximum value. Therefore, when the speed pattern preparation period of the positioning device is changed, the minimum resolution changes, and when the speed resolution becomes insufficient due to the speed unit specified by a user and speed data maximum value specified by the user, the speed data maximum value is limited.

Therefore, an object of the invention is to provide a dynamic optimizing method for speed data, which does not fix the resolution of speed data to be used inside a positioning device, but distinguishes a dynamic optimum resolution, and

in accordance with various speed pattern preparation cycles, user specified speed units, and speed data maximum values and minimum resolutions, can provide an environment which guarantees constant accuracy in a speed pattern determined by the user.

Furthermore, another object of the invention is to provide a positioning device using this method.

#### Disclosure of Invention

In order to solve the abovementioned problem, the present invention provides a dynamic optimizing method for speed data used for preparing a speed instruction pattern fed to a servo motor in a positioning device, characterized in that a speed pattern generator is provided, which calculates a desired speed pattern when a moving distance, speed, acceleration time, and deceleration time are inputted, a speed pattern preparation cycle can be specified by a user without a possibility that the speed data maximum value and minimum resolution of the speed data are modified.

According to a first aspect of the invention, the dynamic optimizing method for speed data is characterized in that a combination of a speed data maximum value and a minimum resolution can be selected by a user.

In addition, when a user specifies the speed pattern preparation cycle, the speed data maximum value and minimum resolution are prevented from changing by shifting the decimal part of the speed data to the right or left.

Furthermore, a positioning device using a servo motor comprises a moving instruction input unit, a speed pattern preparation unit for inputting a moving instruction from this moving instruction input unit, a speed instruction unit for outputting a speed instruction based on a speed instruction pattern from the speed pattern preparation unit in accordance with the speed instruction cycle specified by a user, and a servo control unit for driving the servo motor based on the speed instruction from this speed instruction unit.

According to this dynamic optimizing method for speed data, even when the speed pattern preparation cycle is dynamically changed, the speed data maximum value and minimum resolution are not influenced by this change, so that it becomes unnecessary to change a user program even when a user changes the speed pattern preparation cycle.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a conceptual diagram of program execution processing of a positioning device relating to an embodiment

of the invention;

Figs. 2 are drawings showing speed data prepared by the speed pattern preparation unit of Fig. 1; and

Figs. 3 are drawings showing conventional speed data.

Best Mode for Carrying Out the Invention

Hereinafter, an embodiment of the invention is explained with reference to the drawings.

In Fig. 1, the speed pattern preparation unit 1 is a controller comprising a CPU module and a motion module for a positioning device. The moving instruction 2 is to be inputted into the speed pattern preparation unit 1, and includes a speed, moving distance, and acceleration and deceleration constant (S-shaped pattern). The speed pattern preparation cycle 3 indicates a cycle (scanning cycle 8ms through 64ms) of a speed instruction outputted by the positioning device, and is specified by a user. The computation result 4 (speed instruction unit) is based on the speed pattern preparation unit 1, and outputs a speed instruction in each cycle based on the prepared speed pattern. The servo control unit 5 drives the servo motor 6 based on the speed instruction, and controls the motor position and speed.

Next, operations are explained.

The speed pattern preparation unit 1 calculates a speed pattern based on the inputted speed pattern preparation cycle 3 and moving instruction (moving distance and acceleration and deceleration time) 2, and the size of the computing range in this case is set to have a fixed length inside the positioning device. In this computing range with a fixed length, as shown in Figs. 2, when speed data is held in the fixed decimal mode, the size of speed data is fixed to a size of 16 bits, 32 bits, or 64 bits. Figs. 2 show an example in which the speed data size is 32 bits.

The fixed decimal mode is characterized in that the sum of significant digits of the integer part and significant digits of the decimal part from the fixed decimal point position are always fixed, so that under the same speed pattern preparation cycle condition, if the integer part is taken to be large, the decimal part becomes small, and the resolution lowers. On the contrary, if the decimal part is taken to be large, the integer part becomes small, and the integer output range is reduced.

When the speed pattern preparation cycle 3 is fixed, for example, as shown in Fig. 2(a) and Fig. 3(a), and when the speed pattern preparation cycle 3 is 8ms and the speed is the same, that is, the speed is constant, the integer part and decimal part can be fixed at an optimum ratio, for example, an integer

part is fixed to be 16 bits and the decimal part is fixed to be 16 bits. However, when the speed pattern preparation cycle is dynamically changed, if the ratio of the integer part and the decimal part is fixed, the speed pattern preparation cycle influences the speed pattern resolution and speed data maximum value, so that it is necessary to modify the user program for each change in the speed pattern preparation cycle. That is, in the example of Figs. 3, when the speed pattern preparation cycle changes from 8ms to 64ms as shown in Fig. 3(b), it is necessary to modify the program based on the corresponding ratio of the speed data maximum value and minimum resolution of Fig. 3(a).

Therefore, the invention is constructed so that, as shown in Fig. 2(b), even when the speed pattern preparation cycle 3 is changed to 64ms, the decimal part is shifted to the right to prevent the integer part of 19 bits, decimal part of 13 bits, speed data maximum value, and minimum resolution from changing, wherein by shifting the decimal part to the right or left, even when the speed pattern preparation cycle is changed, the speed data maximum value and minimum resolution do not change, and this makes modification of the user program unnecessary.

Furthermore, this combination of the speed data maximum value and minimum resolution is arranged so as to be set when

inputting the moving instruction 2 and selected by a user, the positioning device shifts the decimal part of the speed data in accordance with the speed pattern preparation cycle so as to prevent the specified inputted speed data maximum value and minimum resolution from changing, so that a user can select an optimum data holding method, and can efficiently utilize controller resources in program preparation, look-ahead, and analysis.

Comparison with the floating decimal mode in which the decimal point position is variable makes no sense since the fixed decimal mode and floating decimal mode are different from each other in data structure and characteristics.

As described above, according to the invention, a dynamic optimizing method for speed data used for preparing a speed instruction pattern fed to a servo motor in a positioning device is characterized in that a speed pattern generator for calculating a desired speed pattern when a moving distance, speed, acceleration time, and deceleration time are inputted, the speed pattern preparation cycle can be specified by a user without a possibility of modifying the speed data maximum value and minimum resolution of the speed data. Therefore, even when the speed pattern preparation cycle is changed, compensation is carried out so as to prevent the speed data maximum value

and minimum resolution of the speed data from changing, the combination of the speed data maximum value and minimum resolution can be selected by a user, and furthermore, when auser specifies the speed pattern preparation cycle, by shifting the decimal part of the speed data to the right or left, the speed data maximum value and minimum resolution can be prevented from changing. Accordingly, it is unnecessary for a user to modify the user program even when the user changes the speed pattern preparation cycle.

#### Industrial Applicability

The invention provides a positioning control device which a user can easily operate. Furthermore, this device is extremely effective for control of a linear motor which requires a high feeding speed and highly accurate positioning.

#### WHAT IS CLAIMED IS:

 A dynamic optimizing method for speed data used for preparing a speed instruction pattern fed to a servo motor in a positioning device, wherein

a speed pattern generator for calculating a desired speed pattern when a moving distance, speed, acceleration time and deceleration time are inputted is provided, and the speed pattern preparation cycle is allowed to be specified by a user without a possibility that the speed data maximum value and minimum resolution of the speed data are changed.

- 2. The dynamic optimizing method for speed data according to Claim 1, wherein a combination of the speed data maximum value and minimum resolution is allowed to be selected by a user.
- 3. The dynamic optimizing method for speed data according to Claim 1, wherein when a user specifies the speed pattern preparation cycle, the decimal part of the speed data is shifted to the right or left so as to prevent the speed data maximum value and minimum resolution from being changed.
- 4. A positioning device using a servo motor, comprising: a moving instruction input unit, a speed pattern preparation unit for inputting a moving instruction from the moving instruction input unit, a speed instruction unit for outputting

a speed instruction based on the speed instruction pattern from the speed pattern preparation unit in accordance with the speed instruction cycle specified by a user, and a servo control unit for driving the servo motor based on the speed instruction from the speed instruction unit.

#### (19) 世界知的所有権機関 国際事務局



# . 1881 | 1881 | 1881 | 1881 | 1881 | 1881 | 1882 | 1883 | 1884 | 1884 | 1884 | 1884 | 1884 | 1884 | 1884 | 1884

#### (43) 国際公開日 2001年3月29日(29.03.2001)

## PCT

### (10) 国際公開番号 WO 01/22184 A1

G05D 3/12 (72) 発明者;および (51) 国際特許分類?: (75) 発明者/出願人 (米国についてのみ): 橋本洋一 (HASHIMOTO, Youichi) [JP/IP]; 〒806-0004 福岡県北九州市八幡西区黒崎城石2番1号 株式会社 安川電 (21) 国際出願番号: PCT/IP00/06004 機内 Fukuoka (JP). (22) 国際出願日: 2000 年9 日4 日 (04 09 2000) (81) 指定国 (国内): US. (25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ: 特願平11/267547 1999年9月21日 (21.09.1999) JP

(84) 指定国 (広域): ヨーロッパ特許 (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(71) 出願人 (米国を除く全ての指定国について): 株式会社 安川雷機 (KABUSHIKI KAISHA YASKAWA DENKI)


添付公開書類: 国際調査報告書

[JP/JP]; 〒806-0004 福岡県北九州市八幡西区黒崎城 石2番1号 Fukuoka (JP).


2 文字コード及び他の略語については、 定期発行される 各PCTガゼットの巻頭に掲載されている「コードと略語 のガイダンスノート」を参照。

(54) Title: DYNAMIC OPTIMIZING METHOD FOR SPEED DATA AND POSITIONING DEVICE USING THIS METHOD

(54) 祭明の名称: 速度データの動的最適化方法およびこの方法を用いた位置決め装置



(57) Abstract: A dynamic optimization method for speed data, for compensating for a speed data maximum value and a minimum resolution that can be specified by users without depending on a speed pattern preparation cycle. A dynamic optimizing method for speed data used for preparing a speed instruction pattern fed to a servo motor in a positioning device, wherein a speed pattern generator (1) that calculates a desired speed pattern when a moving instruction (2) such as a moving distance, speed, acceleration time and deceleration time is input is provided, and a speed pattern preparation cycle (3) can be specified by users without the possibility that a speed data maximum value and a minimum resolution of speed data are modified.

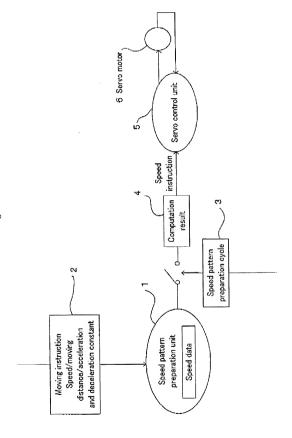

<u>п</u> Р

Fig. 2(a) When the speed pattern preparation cycle is 8m sec:




Fig. 2(b) When the speed pattern preparation cycle is 64m sec:



Fig. 3(a) When the speed pattern preparation cycle is 8m sec.



Fig. 3(b) When the speed pattern preparation cycle is 64m sec:



Docket No.

Armstrong, Westerman & Hattori, LLP

# DECLARATION FOR U.S. PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the plural names are entitled	original, first and sole invento listed below) of the subject ma	r (if only one name is liste tter which is claimed and	ed below) or an original, first a for which a patent is sought or	and joint inventor (if a the invention
DYNAMIC	OPTIMIZATION METHOL	FOR SPEED DATA A	ND POSITIONING DEVIC	<u>E</u>
USING THI	S METHOD			
the specification	of which is attached hereto unl	ess the following is check	ted	
PCT/JP00/0600-	September 4, 2000 as United 5 4 and was amended on	if applicable).		
as amended by a	t I have reviewed and understa ny amendment referred above.			
Regulations, § 1.				
patent or invento	oreign priority benefits under T or's certificate listed below and g a filing date before that of the	have also identified below	w any foreign application for p	n application(s) for eatent or inventor's
certificate navini	g a filing date before that of the	application for which pri	tority is clauned.	Priority Claimed
(List prior foreign			21/09/1999	⊠ Yes □ No
applications. See note A on back of	11-267547	JAPAN (Country)	(Day/Month/Year Filed)	
this page)	(Number)	(Country)	(Day/Month/Teal Filed)	☐ Yes ☐ No
	(Number)	(Country)	(Day/Month/Year Filed)	
	,			☐ Yes ☐ No
	(Number)	(Country)	(Day/Month/Year Filed)	
				Yes No
	(Number)	(Country)	(Day/Month/Year Filed)	
	ruent or some bullet		ditional prior foreign applicati	
insofar as the se the manner pro	the benefit under Title 35, Un abject matter of each of the cla wided by the first paragraph ich is material to patentability en the filing date of the prior a	ims of this application is of Title 35, United State as defined in Title 37.	not disclosed in the prior Uni is Code, § 112, I acknowled Code of Federal Regulations	ge the duty to disclose i, § 1.56 which became
				atus
(List prior U.S. Applications)				Pending 🗀 -
	(Application Serial No.)	(Filing Date)	Aban	doned
	(Application Schai No.)	(i iiiig bate)	☐ Detembed	Pending
				renaing doned
	(Application Serial No.)	(Filing Date)	Abaii	doned
	( -FLuggion same 100)	······································	Patented	Pending 🔲
			Abar	doned
	(Application Serial No.)	(Filing Date)	<del>_</del>	

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

\*<u>23850</u>\* 23850

Please direct all communications to the following address:

(Sec note C)

1-00

\*23850\*

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18 of the intied States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or fi	irst inventor (given name, family name)		Youichi HASHIMOTO				
nventor's signature	Yourch: Hashi moto		Date	Mar.	1/+4	2002	
Residence	Kitakyushu-shi, JAPAN		Citizen	ship		JAPAN	
Post Office Address	c/o KABUSHIKI KAISHA Y		ENKI				
	2-1, Kurosaki-Shiroishi, Yahatanishi-ku, Kitakyushu-shi, Fukuoka, 806-0004						
	JAPAN						
Full name of second i	nventor (given name, family nan	ne) _			_,		
Inventor's signature	-		Date				
Residence			Citizen	ship			
Post Office Address							
Full name of third in Inventor's signature Residence Post Office Address	ventor (given name, family name		Date Citizer	nship			
Full name of fourth i	nventor (given name, family nan	ne) _	Date				
Residence			Citize	nship			
Post Office Address							

#### NOTES

- Please list all foreign applications relating to the invention and check block "yes" or "no".
- B. If more than 4 prior foreign applications, please check this box and attach a sheet listing the remaining prior foreign applications.
- C. For residence in the U.S., indicate <u>city and state</u>, for residence outside the U.S., indicate <u>city and country</u>. The "Post Office Address" must be an address acceptable by a Post Office for delivery of mail.